

# Portable Omni Directional Antenna for 2400 - 2500 MHz

Version 1

## SAA04-050010




### Electrical Specification

Frequency range	2400 – 2500 MHz
Gain	2.2 dBi
VSWR	2.0 : 1 (Max.)
Polarization	Linear, vertical
Horizontal HPBW	360°
Vertical HPBW	80°
Power handling	2 W (cw)
Input impedance	50 Ohm
Cable	RG174, 40cm
Connector	RP MMCX plug



### Environmental & Mechanical Characteristics

Temperature	-10°C to +55°C
Humidity	95% @ 25°C
Radome color	Black
Radome material	ABS, UV resistant
Weight	15 g
Dimensions	70 x 18 x 6.4 mm

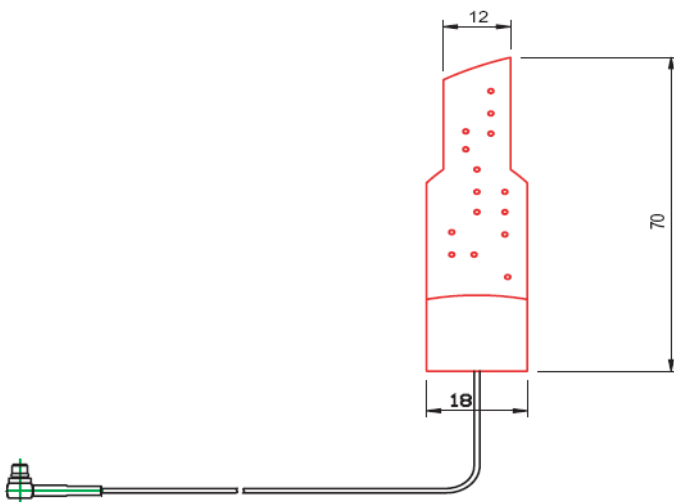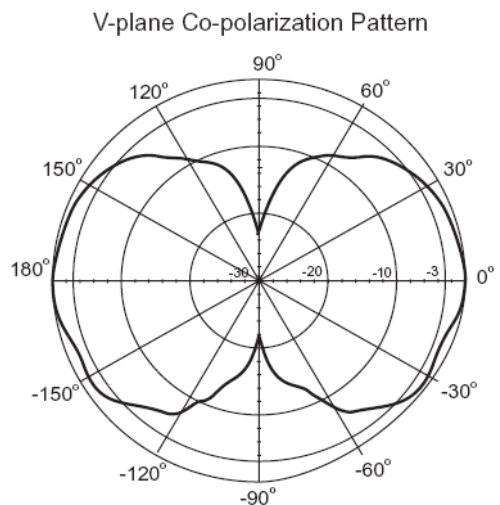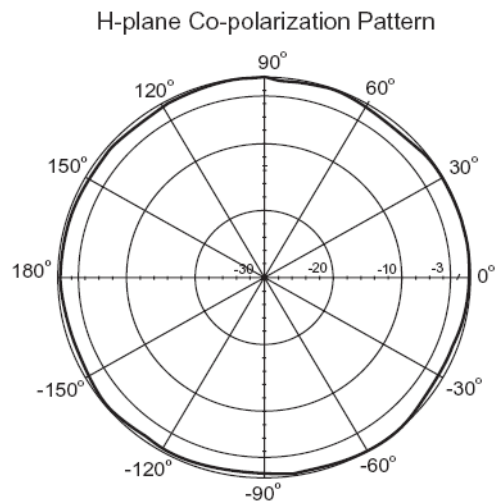

Dimensions(mm)