

Swivel Access Point Antenna

for 2400 - 2500 MHz

Version 3

SAA04-05005L


Electrical Specification

Frequency range	2400 - 2500 MHz
Gain ¹	2.5 dBi
VSWR	2.0 : 1 (Max.)
Polarization	Linear, vertical
HPBW / horizontal	360°
HPBW / vertical	80°
Power handling	2 W (cw)
Impedance	50 Ohm
Connector	RP SMA plug


1. Exclusive of cable loss

Environmental & Mechanical Characteristics

Temperature	- 10°C to +55°C
Humidity	95% @ 55°C
Radome color	Black
Radome material	PU, ABS, UV resistant
Weight	18 g
Dimensions	φ14 x 128 mm

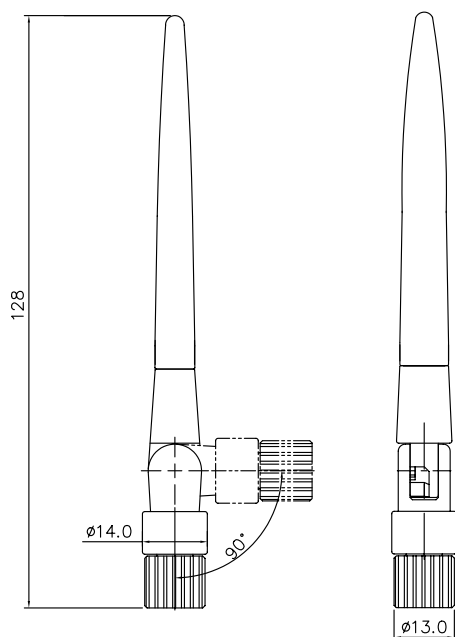

H-plane co-polarization Pattern

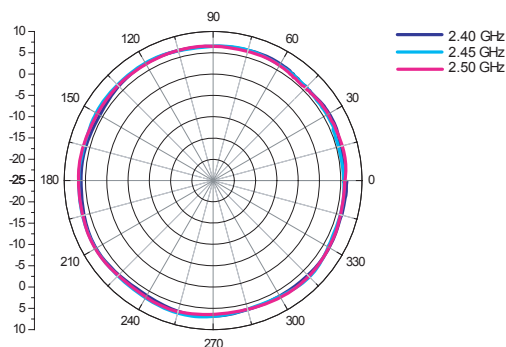

V-plane co-polarization Pattern

