

Swivel Access Point Antenna for 2400 - 2500 MHz

Version 1

SAA04-05006I


Electrical Specification

Frequency range	2400 – 2500 MHz
Gain	2 dBi
VSWR	2.0 : 1 (Max.)
Polarization	Linear, vertical
Horizontal HPBW	360°
Vertical HPBW	80°
Input impedance	50 Ohm
Cable	N/A
Connector	RP SMA plug
Power handling	2 W (cw)
Lightning protection	N/A




Environmental & Mechanical Characteristics

Survival wind speed	N/A
Temperature	-10°C to +55°C
Humidity	95% @ 55°C
Radome color	Black
Radome material	ABS, UV resistant
Weight	8.5 g
Dimensions	φ 10 x 111.7 mm
Waterproof	N/A
Mounting kit	N/A

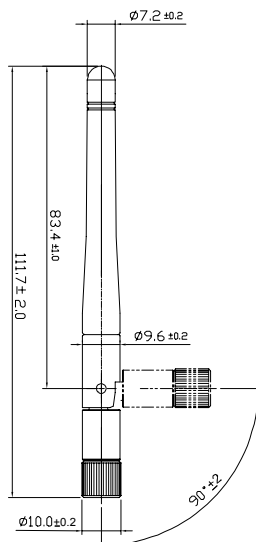

H-plane co-polarization Pattern

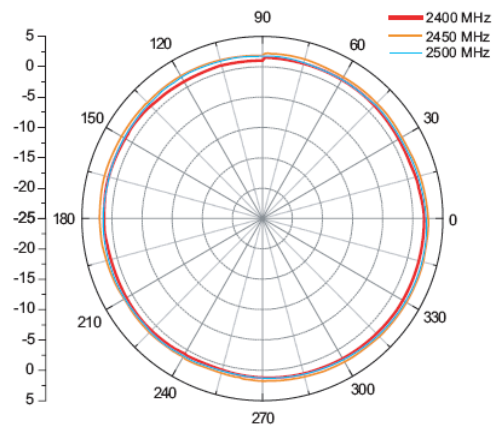

V-plane co-polarization Pattern

