

Desktop Omni-Directional Antenna for 2.4 GHz

Version 2

SAA04-050860

Electrical Specification

Frequency range	2400 MHz - 2500 MHz
Gain *	4 dBi
VSWR	2.0 : 1 Max.
Polarization	Linear, vertical
HPBW / horizontal	360°
HPBW / vertical	55°
Impedance	50 Ohms
Power handling	2 W (cw)
Connector	RP SMA plug
Cable	ULA 100, 1 m, black


* Exclusive of cable loss



Environmental & Mechanical Characteristics

Temperature	- 10°C to +55°C
Humidity	95% @ 55°C
Radome color	Black
Radome material	PU
Weight	0.09 kg
Dimensions	φ60 x 145 mm

H-plane Co-polarization Pattern

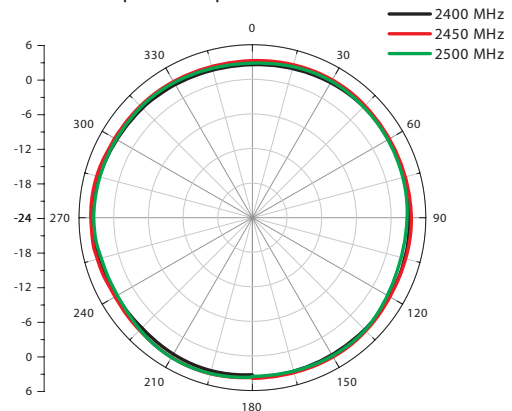

V-plane Co-polarization Pattern

