

Desktop Omni-Directional Antenna for 2.4 GHz

Version 3

SAA04-050920

Electrical Specification


Frequency range	2400 MHz - 2500 MHz
Gain ¹	2 dBi
VSWR	2.0 : 1 Max.
Polarization	Linear, vertical
HPBW / horizontal	360°
HPBW / vertical	65°
Impedance	50 Ohms
Power handling	2 W (cw)
Connector	RP SMA Plug
Cable	ULA 100, 1M, black

¹ Exclusive of cable loss




Environmental & Mechanical Characteristics

Temperature	- 10°C to +55°C
Humidity	95% @ 55°C
Radome color	Black
Radome material	PU
Weight	55 g
Dimensions	φ50 x 84 mm

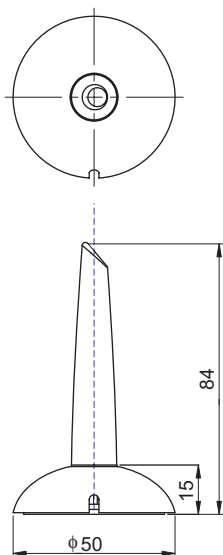

H-plane Co-polarization Pattern

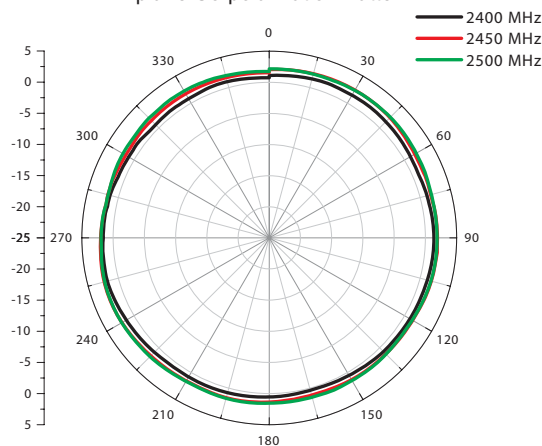

V-plane Co-polarization Pattern

