

Omni Directional Antenna for 2300 - 2700 MHz

Version 1.0

SAA07-050860

Electrical Specification


Frequency range	2300 - 2700 MHz
Gain	10 dBi
VSWR	2.0 : 1 Max.
Polarization	Linear, Vertical
HPBW/horizontal	360°
HPBW/vertical	10°
Input impedance	50 Ohm
Cable	N/A
Connector	N Jack
Power handling	10 W (cw)
Lightning protection	DC Ground



Environmental & Mechanical Characteristics

Survival wind speed	216 km/hr
Temperature	-40°C to +80°C
Humidity	95% @ 55°C
Radome color	White
Radome material	Fiber glass, UV Resistant
Weight	1.72 kg
Dimensions	1175 x 78 x 80 mm
Waterproof	IPX5
Mounting kit	Wall Mount & Pole Mount

H-plane

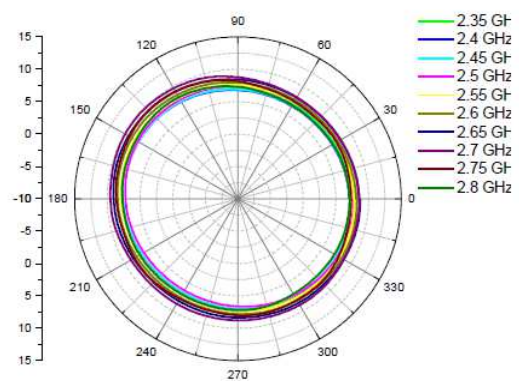

V-plane

